
Pole Mount Frame - Clamp Bar Style Arms Installing The Banner



Lay out your banner and the Live End and Dead End arms as shown. The printed side of the banner should be facing up. The black Thumb screws of the arms should be facing up.

Manufactured in the USA by

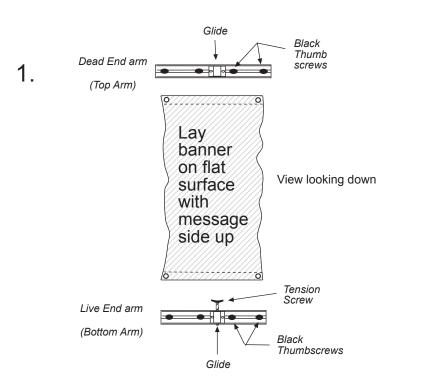

10746 Worcester Highway P.O. Box 200 Berlin, MD 21811 800-386-9767 www.voxpopms.com 2.



Make sure the black thumb screws are retracted far enough to allow room for the hemmed ends of the banner to be inserted into the wide opening of the arm. Slide the hemmed ends of the banner all the way back into the openings of both arms and tighten all "eight" of the black thumb screws firmly.




Next - turn arms away from center until they are upside down from their original position. The banner should now cover the arms and still be face up.





The banner is ready to be attached to the frame.



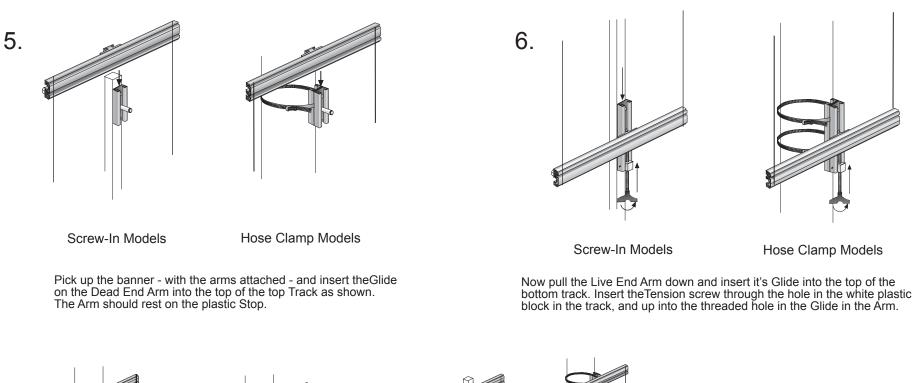

FINISHED DISPLAY





Screw-In Models

Hose Clamp Models

Tighten the Tension Screw clockwise until the banner is taut. If there is too much slack in the banner you may need to adjust the track position.

FOR DOUBLE SIDED POLE MTS - repeat for opposite side

TO REMOVE BANNER: 1. Unwind Tension Screw & remove

- 2. Lift top Dead End Arm out of track
- 3. Lift bottom Live End Arm out of track
- 4. Loosen back thumb screws on Arms and remove banner

Questions? Problems?

Call Voxpop at 1-800-386-9767 or e-mail: service@voxpopms.com

www.voxpopms.com