

# Pole Swiveler System Installation Instructions



TOOLS NEEDED: Flat Head Screwdriver Phillips Head Screwdriver 5/16" Socket Wrench

1

Fasten the mounting bracket to the Swiveler Frame with the nuts and bolts included as shown. There are two brackets for each frame.

**Single Displays:** Thread a hose clamp through the slots in each of the brackets.

**Double Displays:** Thread through brackets on both frames as shown

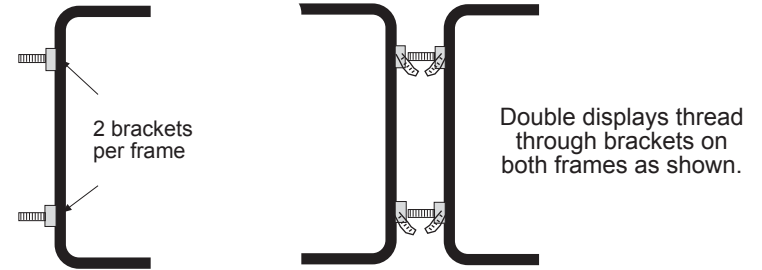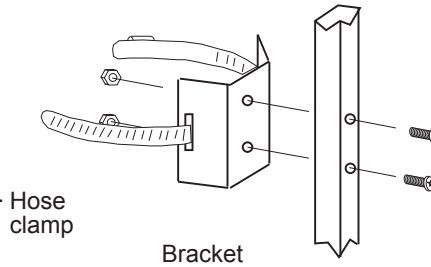


2

Determine the height and orientation of your display.

**Single displays:** Tighten the frame to the pole with the hose clamps.


**Double displays:** Holding both frames opposite each other on the pole, tighten the clamp securely on both sets of brackets.



3


Insert the 1/4" rod through the CENTER FLUTE in the coroplast panel.

Slide the plastic collars on the top and bottom of the rod. You will need to hold the bottom collar to keep it from falling off.



4


Holding the bottom collar on the rod, lift the panel and insert the top of the rod into the thru-hole in the Top Arm. Push it as high as it will go. The bottom of the rod will just barely clear the bottom Arm. Maneuver the bottom of the rod into the hole in the bottom Arm.

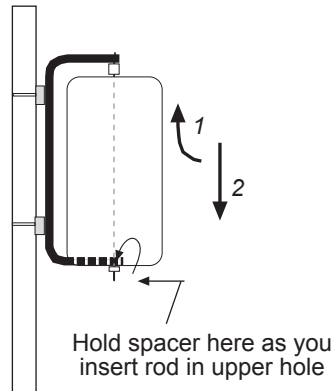

5

★ THIS STEP MAY REQUIRE 2 PEOPLE

Hold the rod at the bottom to keep it from slipping down. Screw a locking wing nut onto the threaded end of the rod at the TOP first, and then the bottom, as shown. Tighten securely.

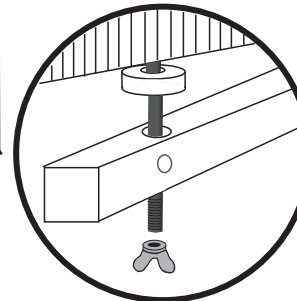

Double displays just repeat on the other side.

